

Certified  
Comparator  
Products

## CC-16L Contour Projector®

The **CC-16L** is a compact, benchtop optical comparator with exceptional screen brightness and functionality.

The large and evenly illuminated 16" diameter screen shows crisp, well-defined images using either standard profile light or oblique ring light.

- Exclusive TruLight® all-LED illumination
- CC-16 is "rock solid" with its cast mineral composite base that provides structural integrity for consistent performance in shop environments
- Optional internal optical edge detection

Proudly designed and manufactured in the United States of America

Large Screen Optical Comparator At A Low Price




# CC-16L Contour Projector

## Available Options and Accessories:

- Adjustable direct projection iris
- EdgeScan™ internal automatic edge detection (requires a Quadra-Chek DRO)
- Projectron® automatic grayscale edge detection (requires a Q-Check DRO)
- Fixture and calibration reticles
- Fresnel lens
- Overhead light shield
- Glass and plastic overlay charts
- Steel weldment stand
- Ergonomic, motorized adjustable height stand
- Service and support contracts

## Optional Software:

- MeasureFit® Plus
- SmartReport® with real-time statistics
- Quadra-Chek® QC-Wedge (requires Microsoft® Excel™)

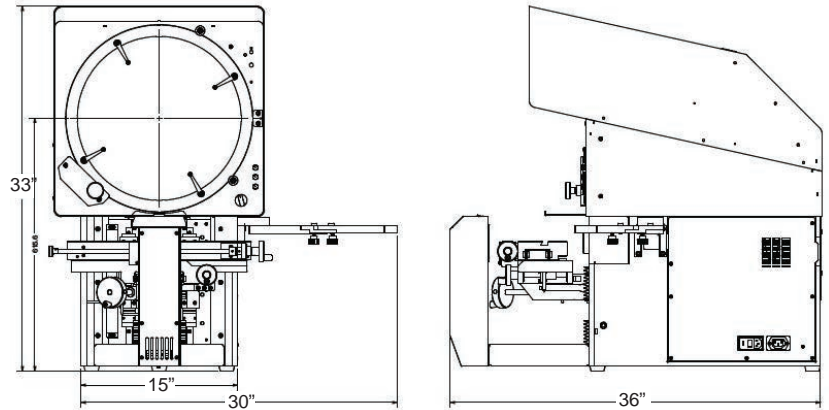

System Weight: 425 lb

	Standard	Optional
<b>XY Travel Range</b>	12" x 4"	
<b>Focus Travel (Z)</b>	1.5" with precision fine adjustment	
<b>XY Positioning</b>	Precision, with heavy duty substage for vertical motion	
<b>Throat Clearance</b>	8.5"	
<b>XY Scale Resolution</b>	0.00004"	0.00002"
<b>XY Drive System</b>	Manual, with quick release X-axis and fine adjustment knobs in X and Y	
<b>Worktable</b>	Precision machined aluminum with fixturing slot, 16" x 4.75"	
<b>Recommended Maximum Load Capacity</b>	45 lb	
<b>Optical System</b>	Telecentric, horizontal, with upright, reversed image	
<b>Screen Size</b>	16" diameter screen, with integral hood	
<b>Screen Type</b>	Ground glass with 90° centerlines and clips for mounting 16" overlay charts	
<b>Protractor</b>	Digital screen display, ± 360° readout with 1' (0.017") resolution	
<b>Working Distance</b>	3.4"	
<b>Lens</b>	10X Projection lens	20X, 31.25X, 50X, 100X
<b>Lens Mount</b>	Internal, quick change lens mount and storage rack with locking access door	
<b>Illumination</b>	Profile light: high-brightness green LED with continuously variable intensity Oblique (Dark Field): Ring Light with eight (8) high-brightness white LEDs, with 6 switch-selectable patterns for directional lighting; continuously variable intensity	
<b>Electronics</b>	Choice of Quadra-Chek® QC-100 or QVI Q-Check®	Quadra-Chek QC-200 or QC-300
<b>Power Requirements</b>	115/230VAC, 50/60 Hz, 1φ, 300W	



1175 North Street  
Rochester, NY 14621  
Phone: (585) 758-1300 • (877) 764-6397  
Fax: (585) 506-4307  
www.certifiedcomparator.com

